


New Product Launch Memo

Lockout Tagout: Isolation plugs

Lockout Tagout: Isolation plugs for D01 & D02 and for DII & DIII screw locks

Securing the screw base during maintenance processes

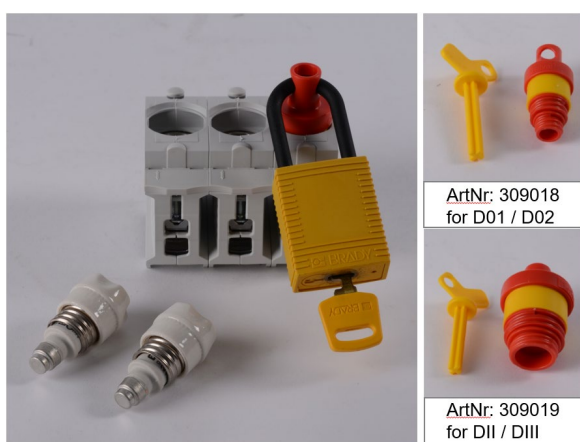

- 2-in-1 Solution - Covers two common screw threads thanks to the 2-part graded thread diameters
- For D01 & D02 (E14 & E18) and for DII & DIII (E27 & E33) screw locks
- No accidental screwing in of fuse possible
- Can accommodate a padlock up to 6.5 mm shackle diameter
- Includes a yellow key for locking and easy removal of the device from the screw base

Specification:

Material:	Non-conductive plastic
Dimensions:	Art. Nr. 309018: Size D01 / D02 (E14/E18): 51 mm H x ø 25 mm Art. Nr. 309019: Size DII / DIII (E27/E33): 60 mm H x ø 40 mm

With the help of the locking systems for screw locks (locking caps), NEOZED (D01 / D02 (E14/E18)) and DIAZED (DII / DIII (E27/E33)) systems can be secured quickly and easily. The lockout device is screwed into the screw base and thus prevents the fuse cartridge from being inserted. Several screw bases can be secured in series by means of cable padlock due to the flexible receptacle.

Logout Tagout – Isolation Plugs

Article Number	Order Reference	Description	Includes
309018	ISOPLUG-D01-D02	Isolation plugs D01 / D02 (E14/E18)	LO device + Yellow key
309019	ISOPLUG-DII-DIII	Isolation plugs DII / DIII (E27/E33)	LO device + Yellow key